

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

Heated Holding Cabinet

Modular countertop **MP 941** 1-drawer
MP 942 2-drawer
MP 943 3-drawer
MP 944 4-drawer



MP 941 modular countertop heated holding cabinet 1 drawer

Henny Penny heated holding cabinets keep hot foods safe and appetizing prior to serving.

The MP 941 is a single drawer, modular unit that can be placed on countertops, side by side or stacked, or mounted under countertops. Multi-drawer units allow separate side-by-side holding environments that can be independently programmed with different temperatures for each drawer. Rear panel outlets allow multiple single drawer units to be conveniently powered from one

electrical source.

With proper holding capability, operators can cook ahead of time and serve on demand during peak periods. The 940 series compact modular design gives foodservice operators great flexibility in locating single or multiple holding units for the best workflow.

Units are welded stainless steel. Drawers and liners are single piece welded stainless steel construction and roll smoothly on tough Rulon® slide bearings. Drawers close completely and seal against high-temperature gaskets.

Cabinets are fully insulated for energy efficient operation.

Control panel features easy-to-read LED temperature display and built-in digital clock.



MP 944 modular countertop heated holding cabinet 4 drawer

Single drawer units can be combined into 2, 3 or 4-drawer units

Standard Features

- Durable, welded stainless steel construction
- Single piece welded drawer and liner
- Fully insulated cabinet
- Snug-fitting drawers on tough, low-friction Rulon bearings
- Positive drawer closure
- High temperature drawer gasket
- Programmable controls with digital temperature display
- Program lock to prevent accidental changes in settings
- Built-in digital clock
- Energy efficient operation
- Slide vent humidity control
- Accepts standard steam table pans
- Adjustable leveling feet (MP 941 only)
- 1 and 3-drawer units have rear-mounted power cords
- 2 and 4-drawer units have side-mounted power cords
- Choice of right or left-side control panel (MP 941 right side only)

Please specify desired control location for 2, 3 and 4-drawer units:

- Right side
- Left side

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE




PROJECT

ITEM NO

Heated Holding Cabinet

Modular countertop
MP 941 1-drawer
MP 942 2-drawer
MP 943 3-drawer
MP 944 4-drawer

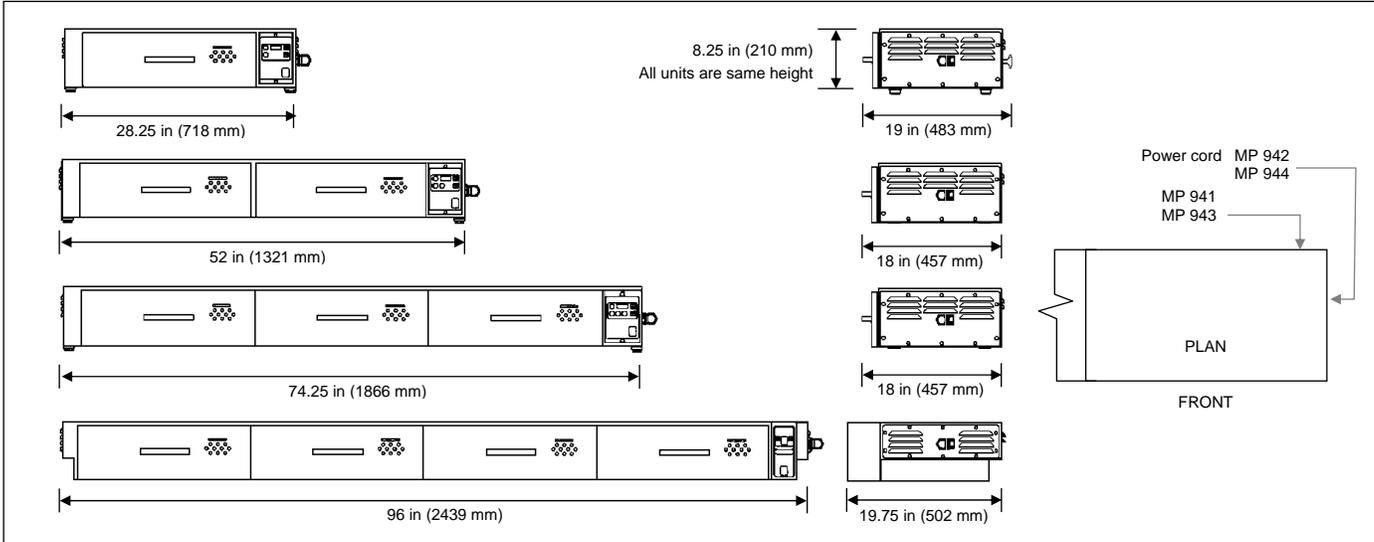

	MP 941	MP 942	MP 943	MP 944
Dimensions				
Height	8.25 in (210 mm)	8.25 in (210 mm)	8.25 in (210 mm)	8.25 in (210 mm)
Width	28.25 in (718 mm)	52.00 in (1321 mm)	74.25 in (1866 mm)	96.00 in (2439 mm)
Depth	19.00 in (483 mm)	18.00 in (457 mm)	18.00 in (457 mm)	19.75 in (502 mm)
Crated				
Length	32 in (815 mm)	55 in (1400 mm)	77 in (1950 mm)	99 in (2515 mm)
Depth	20 in (500 mm)	22 in (560 mm)	20 in (500 mm)	20 in (500 mm)
Height	10 in (254 mm)	12 in (300 mm)	12 in (300 mm)	12 in (300 mm)
Volume	3.7 ft ³ (0.10 m ³)	8.3 ft ³ (0.23 m ³)	11 ft ³ (0.31 m ³)	14.2 ft ³ (0.40 m ³)
Weight	67 lb (30 kg)	139 lb (63 kg)	200 lb (91 kg)	278 lb (126 kg)
Capacity	Full size steam table pan 12 x 20 x 4 in (305 x 508 x 102 mm)			
	1 pan	2 pans	3 pans	4 pans

Required clearances

Control side 2 in (51 mm) for power cord on MP 942, MP 944
 Back 2 in (51 mm) for power cord on MP 941, MP 943

Heat

Thermostat 160°–210°F (71°–99°C)

Humidity

Slide vent control

Electrical

Volts	Phase	Hertz	kW per drawer	Amps per drawer	Wire
120	1	50/60	475	3.9	2+G
230	1	50	475	2.1	1NG

Laboratory certifications



Bidding Specifications

Provide Henny Penny 940 Series modular countertop heated holding cabinet designed to hold varying quantities of hot foods at safe temperatures in separate environments. Multi-drawer units are assembled side-to-side to form the following configurations:

- MP 941 with 1 drawer
- MP 942 with 2 drawers
- MP 943 with 3 drawers
- MP 944 with 4 drawers

Unit shall incorporate

- Programmable temperature controls
- High-quality, welded stainless steel cabinet
- Drawer and liner of single piece, welded stainless steel
- Durable Rulon® bearings for smooth roll
- High-temperature drawer gasket
- Fully insulated cabinet with positive drawer closure
- Choice of right-hand or left-hand controls for multi-drawer configurations
- Adjustable leveling feet (MP 941 only)

Continuing product improvement may subject specifications to change without notice.

24 Hour Technical Support:
 Henny Penny Technical Service
 800.417.8405
technicalservices@hennypenny.com

Henny Penny Corporation
 PO Box 60 Eaton OH 45320 USA
 +1 937 456.8400 800 417.8417
 +1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com

HENNY PENNY
 Engineered to Last